

Ironing machines for knitwear factories, laundries and clothes factories



MOD. NS/300

CE

Steam generator with horizontal water pipes and incorporated boiler It 61,8. Arranged for the connection with vertical blowed burner . The machine is assembled on inox steel foot-board. Burner is not included.



SONNAL IN LE

4

٠

٠

٠

٠


4

Ironing machines for knitwear factories, laundries and clothes factories

TECHINCALS CHARACTERISTICS	MOD.	NS 300
BOILER	Lt.	61,8
WATER ELECTRIC PUMP Volts. 220 Hp. 1	Kwatt.	0,75
SAFETY VALVE	ø	1 1⁄2"
WATER TANK IN INOX STEEL	-	NOT INCLUDED
BOILER CALORIES	Kcal./h	195.000 ****
MAXIMUM STEAM PRODUCTION	Kg/h	300
BOILER DISCHARGE	ø	1"
PIPE SMOKES DISCHARGE	mm.	180
DOUBLE BLOWING STEAGE BURNER - <u>NOT INLUDED</u> ***	Branc	RIELLO UNIGAS
STEAM PRESSURE	bar	4,7
WATER INLET	ø	3/8"
MAXIMUM WATER CONSUPMTION	Lt./h.	300
MAXIMUM DIESEL OIL CONSUMPTION	Lt./h	19 **
MAXIMUM METHANE CONSUMPTION	M³/h	22 **
MAXIMUM GAS GPL CONSUMPTION	Kg./h	15,6 **
STEAM EXIT	ø	3/4"
MAXIMUM TOTAL POWER	Kwatt.	1
ELECTRIC FEED	Volts.	220 *
TENSION	Hz.	50 *
NET WEIGHT (without burner)	Kg.	520
DIMENSIONI H x L x D (without burner)	Cm.	170 x 70 x 100
* Different technicals characteristics are available on demand		
** Specify the kind of fuel on order		
*** The burner is not included. Please ask our company for details .		
**** Boiler with I.S.P.E.S.L. EXEMPTION		

omplete of <u>Complete</u>

- Water hoses boiler It 61,8
- Feeler control level
- Electric-pump for water supply
- Cock for boiler discharge
- Cock for steam exit
- Connection for flue exit

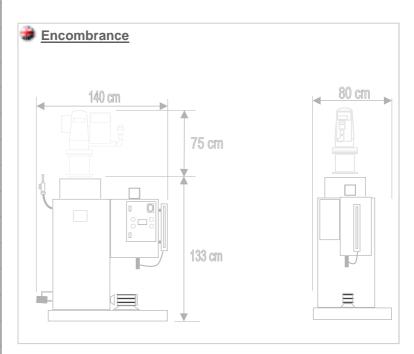



NUSTRI IRONING SYSTEMS

Via della Mora, 7 50058 SIGNA (FI) ITALY Telephone: 0039 055-8734007 Telefax: 0039 055-8735123 Internet: www.nustri.com