

Ironing machines for knitwear factories, laundries and clothes factories









Machine for TROUSER'S SEAM OPENING complete of electrically vacuum/heated arm and condensate trap with one iron. To be connect to a source of central steam





Ironing machines for knitwear factories, laundries and clothes factories

TECHNICALS CHARACTERISTICS	MOD.	140/C
STEAM CONSUMPTION	Kg/h	6
STEAM INLET	Ø	1/2"
CONDENSE DISCHARGE	Ø	1/2"
AIR DISCHARGE PIPE	mm.	100
ELECTRIC VACUUM Hp.0,6 Volts 220	Kwatt.	0.4
STEAM PRESSURE	bar	3,5
MAXIMUM STEAM PRESSURE	bar	6
SURFACE	Kwatt	0.8
IRON Volts.220	Kwatt	0.8
SURFACE DIMENSIONS	cm	115 x 7 x 12
MAXIMUM TOTAL POWER	Kwatt.	2
ELECTRIC SUPPLY	Volts.	220+T *
TENSION	Hz.	50 *
NET WEIGHT	Kg.	65
DIMENSIONS H x L x D	Cm.	102 x 157 x 70
* Different technicals characteristics are available on demand.		

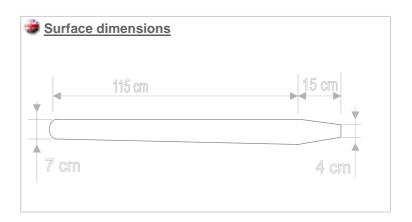

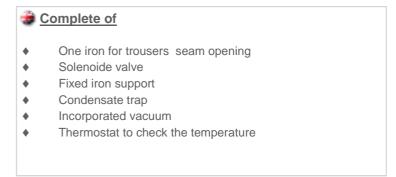

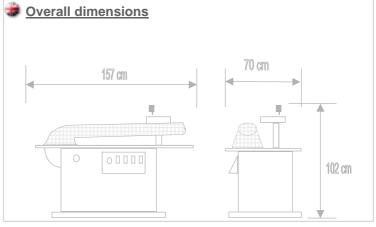

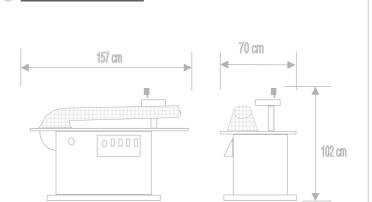

NUSTRI IRONING SYSTEMS

Via della Mora, 7 50058 SIGNA (FI) ITALY

Telephone: 0039 055-8734007 Telefax: 0039 055-8735123

Internet: www.nustri.com